




# JEEP GLADIATOR JT (2020+) REAR WINDOW MOLLE PANEL

## INSTALL INSTRUCTIONS

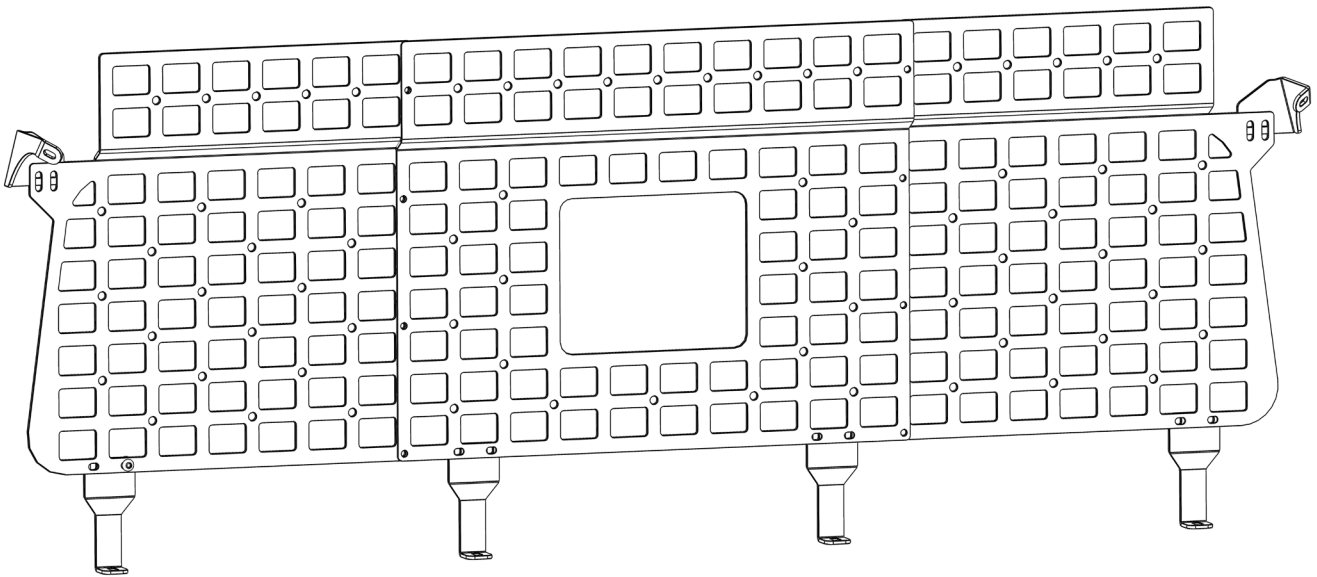

**Please read the mounting instructions below carefully before attempting to install.**


**Be sure to check out the install video on the product page, if available.**

Thank you for purchasing from JcROffroad! Checkout our website, [www.jcroffroad.com](http://www.jcroffroad.com) for other great off-road products. Be sure to rate and review our product online. If you have any questions or are missing parts, please don't hesitate to call us at 269-353-1184!

# INCLUDED HARDWARE


## INCLUDED BOLT PACK(S) 045-0168

20x




1/4"-20 x 1/2"  
Button Head

20x



1/4"-20  
Flange Nut

4x

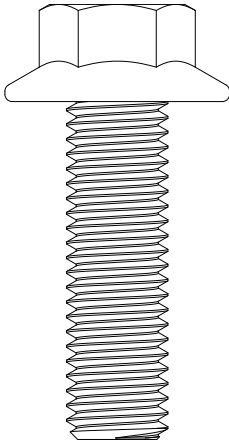


M8 x 1.25mm x 25mm  
Hex Head


Note: Some Victory 4x4/JCR Offroad/SquatchProof products share hardware kits. Any extra hardware you may receive that is not listed above can be reused or discarded.

# INCLUDED PARTS


1L/1R

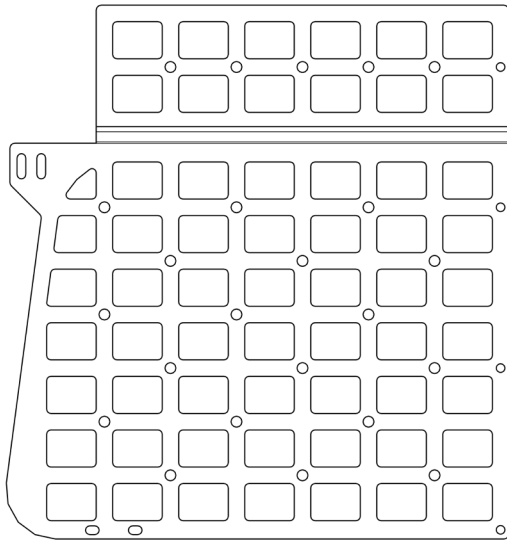


1L/1R



4x

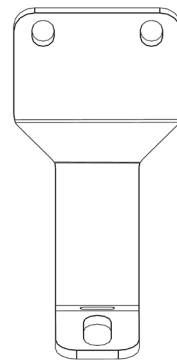

1x

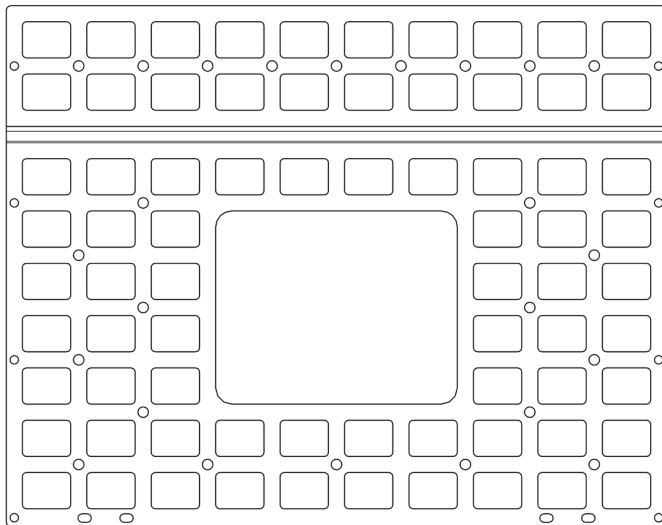

# DISASSEMBLY

1. To start you will need to fold your back seats down for better access to the hard top bolts. Once the seats are down, remove all (4) of the hard top bolts, as shown below.




# ASSEMBLY

2. With the (4) hard top bolts removed, you can take the (4) provided lower brackets and M8 hex heads and install them as shown in the orientation below, replacing the factory hard top bolts with the new M8 hex heads.




# ASSEMBLY

3. You can now take the (3) panel pieces and assemble them together using (8) of the provided 1/4"-20 button heads and flange nuts, as shown in the orientation below.

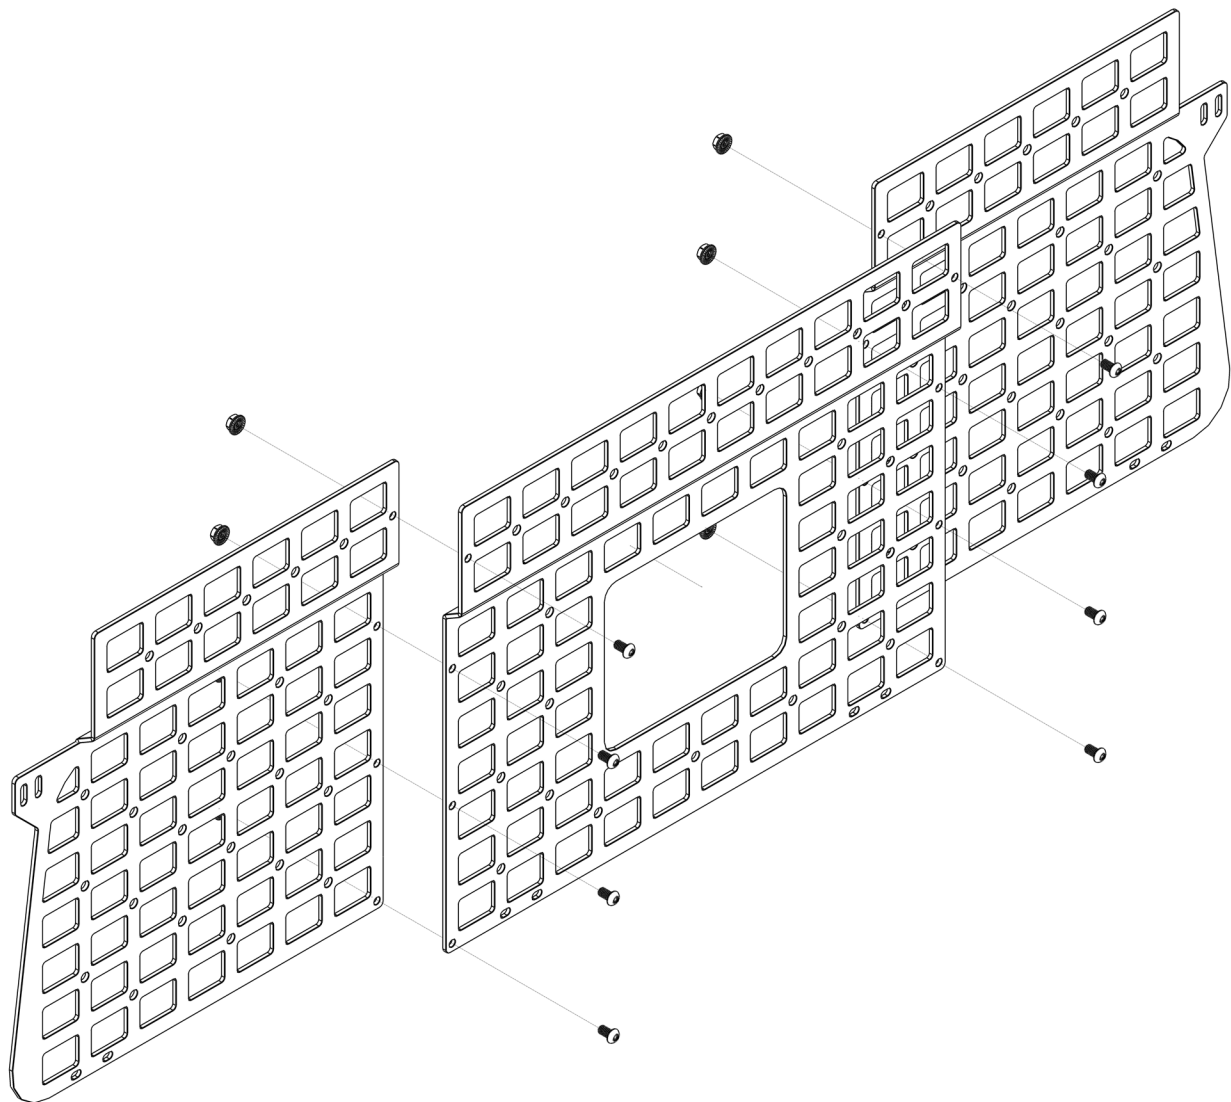


# ASSEMBLY

4. With the panel now assembled, take (8) more of the provided 1/4"-20 button heads and flange nuts, and install the panel to the (4) lower mounting brackets that were previously installed, as shown in the orientation below.

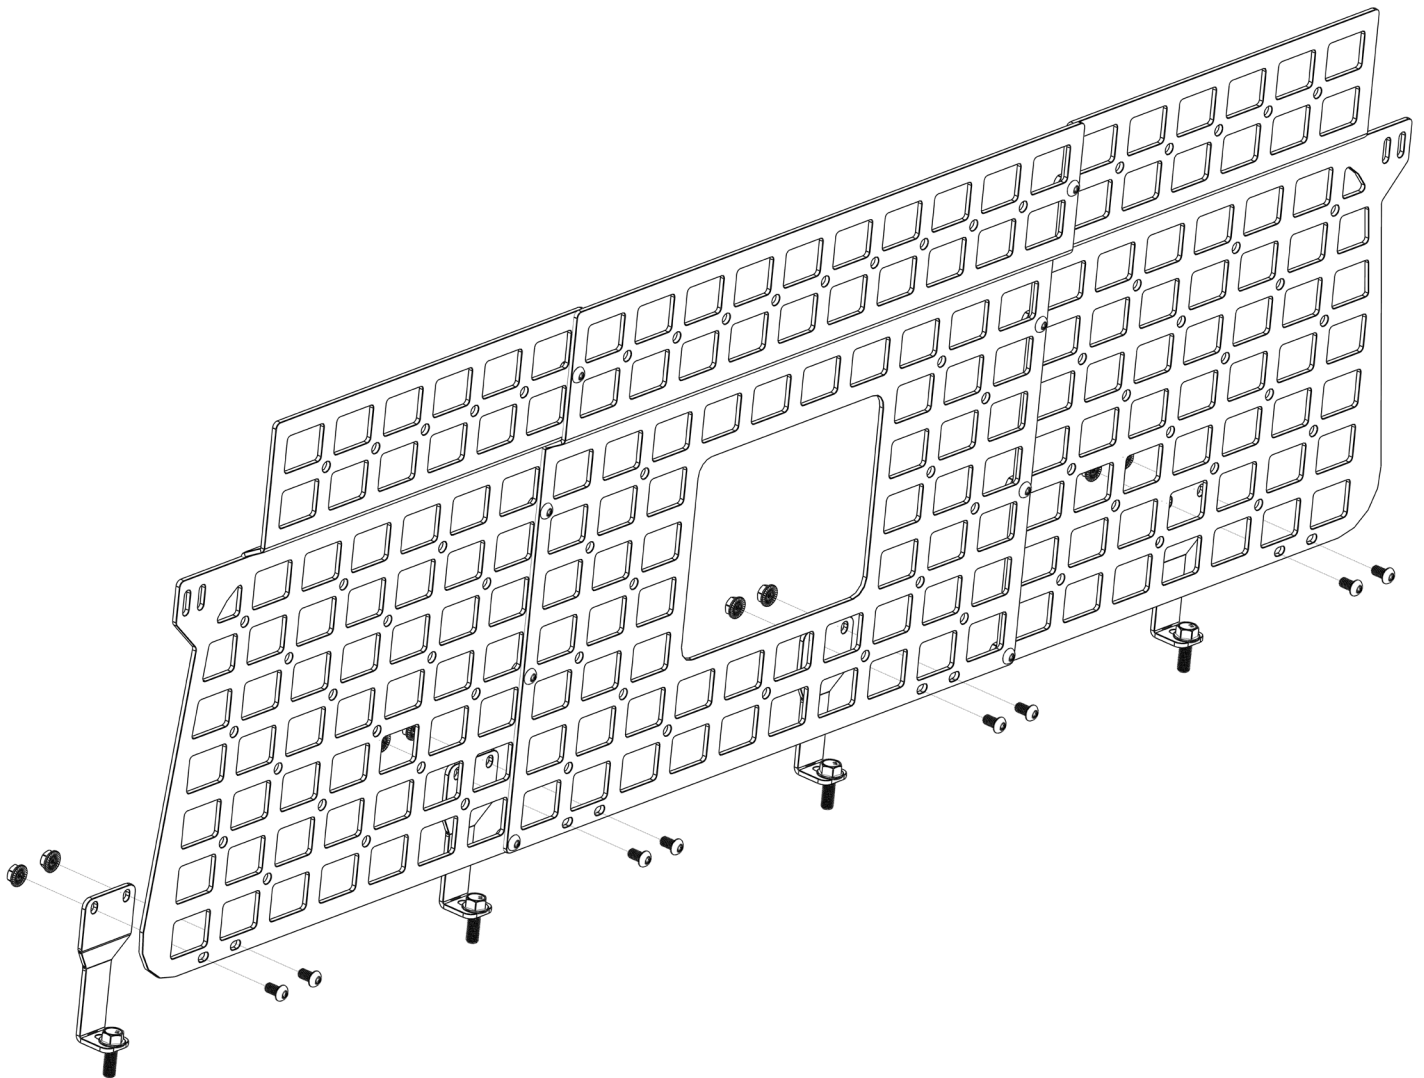

# ASSEMBLY

5. Now that the panel is secure to the bottom mounting brackets, take the last (2) provided top brackets and the last (4) of the 1/4"-20 button heads and flange nuts and bolt them to the panel in the upper corners of each side, as shown in the orientation below. Make sure that the brackets are in front of the panel and the top flanges are out. Leave these hand tight for now so you have some adjustment in the next step.

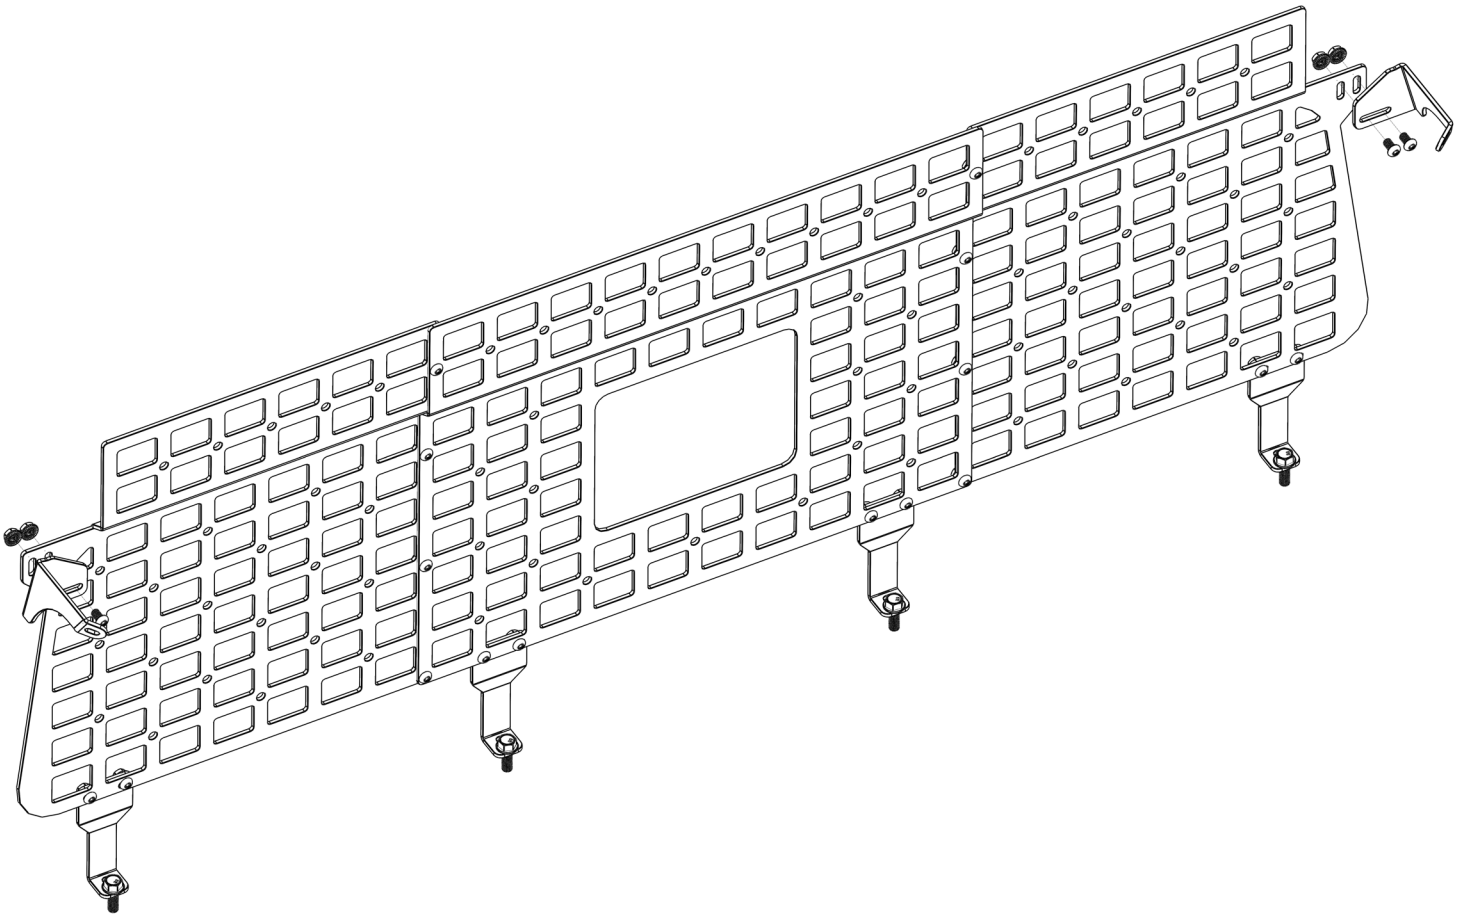



# ASSEMBLY

6. With the top brackets on the panel, you will now need to remove the factory bolt in the roll cage that the mounting hole lines up with. Once the bolt is removed, you will be re-using the same factory bolt through the bracket to hold it in place, as shown below.



# ASSEMBLY

7. Make sure all of your hardware is fully tightened to complete your install. And that's it! Now load up your Molle Panel with your desired equipment such as flashlights, recovery gear, or first aid supplies and hit the trail prepared! Visit us at [www.jcroffroad.com](http://www.jcroffroad.com) to check out other options for made-in-the-USA storage and armor, and follow us on Facebook and Instagram.

